




COLORECHART



eco-FICIENT™
Insulated Metal *Panels*

Product INFORMATION




ECO-FICIENT Insulated BattenLok®

- ▲ Gauges
 - △ Exterior: 24 and 22
 - △ Interiors: 26, 24 and 22
- ▲ Widths: 30", 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'




ECO-FICIENT Classic

- ▲ Gauges
 - △ Exterior: 26, 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36"
- ▲ Thicknesses: 2", 2 1/2", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'



ECO-FICIENT Insulated R Panel

- ▲ Gauges:
 - △ Exterior: 26, 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Widths: 36"
- ▲ Thicknesses: 1 1/2", 2, 2 1/2", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'




ECO-FICIENT Vintage

- ▲ Gauges
 - △ Exterior: 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3" and 4"
- ▲ Length: Recommended maximum is 40'




ECO-FICIENT Grand V

- ▲ Gauges
 - △ Exterior: 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 24", 30" and 36"
- ▲ Thicknesses: 2", 2 1/2", 3" and 4"
- ▲ Length: Recommended maximum is 32'
- ▲ Reveals: 1/8" (standard), 3/4" and 2"




ECO-FICIENT Royal

- ▲ Gauges
 - △ Exterior: 26, 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'



ECO-FICIENT Grand H

- ▲ Gauges
 - △ Exterior: 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 24", 30" and 36"
- ▲ Thicknesses: 2", 2 1/2" and 3"
- ▲ Length: Recommended maximum is 24'
- ▲ Reveals: 1/8" (standard), 3/4" and 2"




ECO-FICIENT Summit

- ▲ Gauges
 - △ Exterior: 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3" and 4"
- ▲ Length: Recommended maximum is 40'

SIGNATURE® 300

Standard Stocked Colors

KYNAR 500® HYLAR 5000® Low Gloss

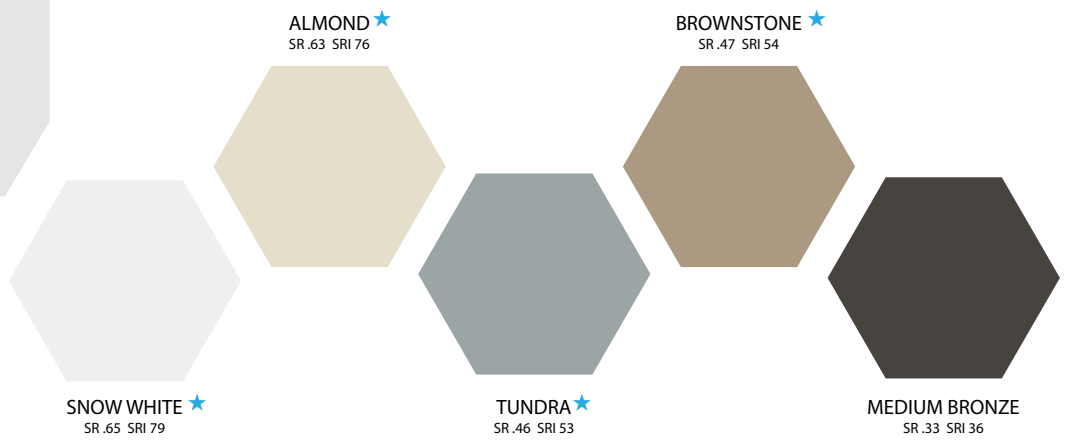


SIGNATURE® 300

Standard Non-Stocked Colors

KYNAR 500® HYLAR 5000® Low Gloss


* Minimum quantities and/or extended lead times may be required. Please inquire.

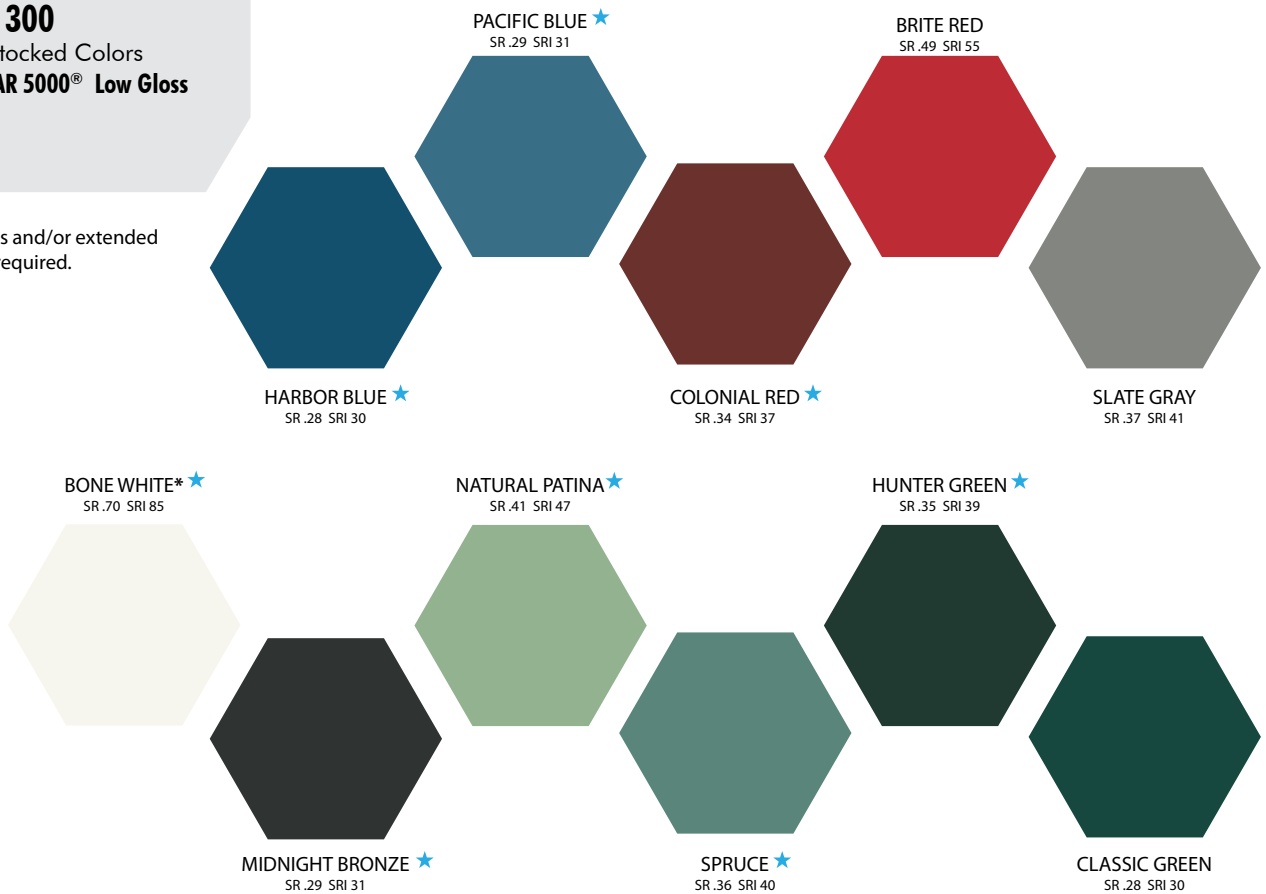

SIGNATURE® 300

Standard Non-Stocked Metallic Colors

KYNAR 500® HYLAR 5000® Low Gloss

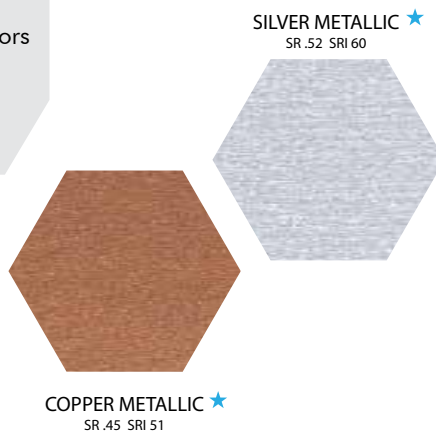


NOTE: Metallic coatings are directional. Panels and trim must be installed oriented in the same direction to prevent perceived shade variances.

SIGNATURE® 200

Standard Stocked Colors

SILICONIZED POLYESTER STANDARD GLOSS

Polar White is a Straight Polyester.

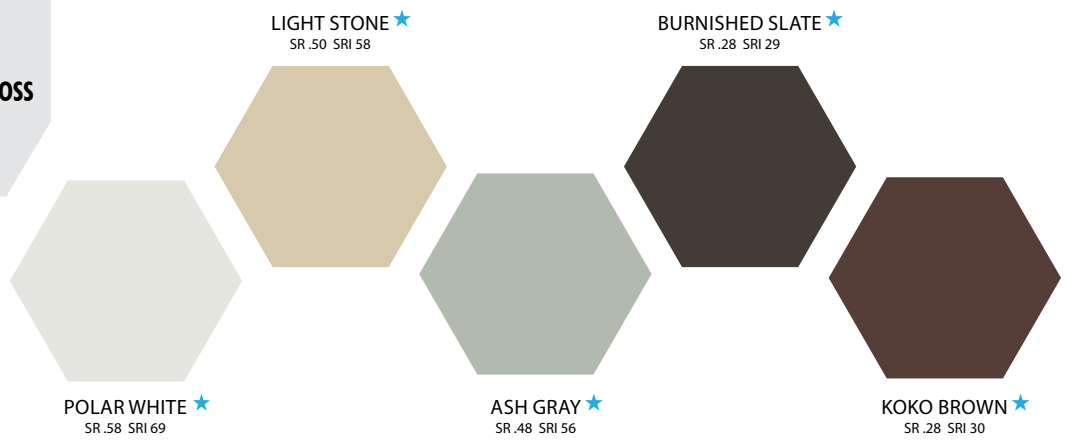


SIGNATURE® 200

Standard Non-Stocked Colors


SILICONIZED POLYESTER

* Minimum quantities and/or extended lead times may be required. Please inquire.

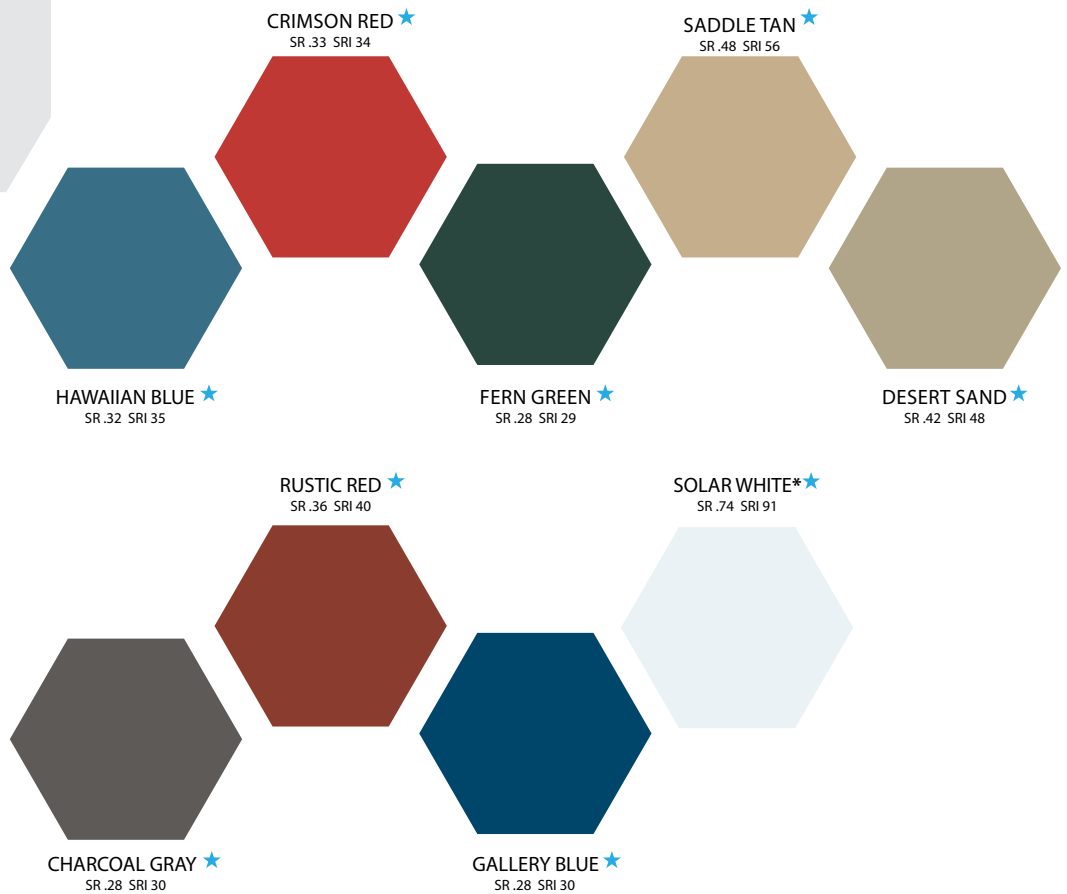

STANDARD INTERIOR COLOR

USDA White is a Siliconized Polyester.




- ▲ Final color selection should be made from actual color chips.
- ▲ See product selection chart for gauge and color availability.
- ▲ Heavier gauges, narrower widths and embossing minimize "oil canning."
- ▲ A 25-year limited paint warranty is available for all colors upon written request. For locations outside the continental USA and Canada, please inquire.
- ▲ Signature® is a registered trademark of NCI Group, Inc.; Kynar 500® is a registered trademark of Arkema, Inc.; Hylar 5000® is a registered trademark of Solvay Solexis.

★ ENERGY STAR
Qualified Color




Applied FINISHES

Textured Finish Colors

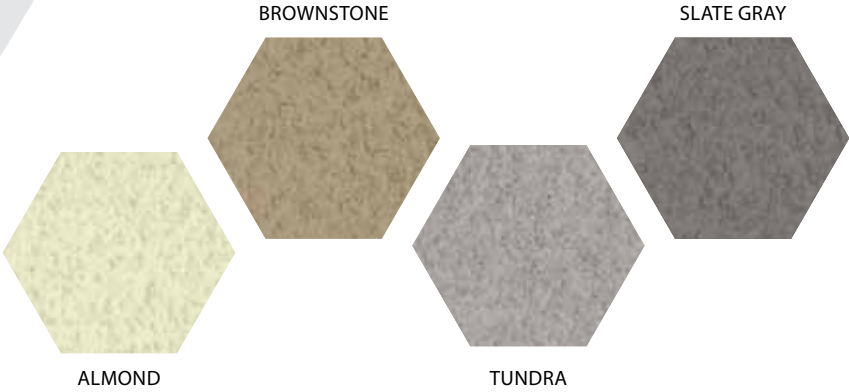

Rockwall Color

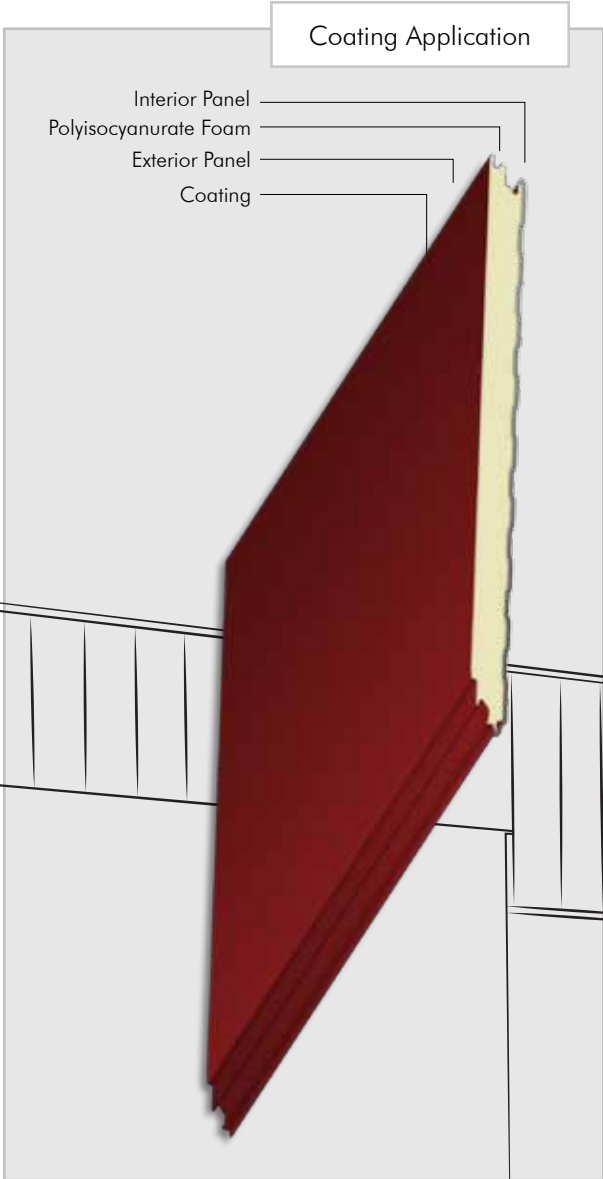



Houston, TX 877-713-6224
Adel, GA 888-446-6224
Atlanta, GA 877-512-6224
Atwater, CA 800-829-9324

Dallas, TX 800-653-6224
Indianapolis, IN 800-735-6224
Jackson, MS 800-622-4136
Lubbock, TX 800-758-6224

Memphis, TN 800-206-6224
Oklahoma City, OK 800-597-6224
Omaha, NE 800-458-6224
Phoenix, AZ 888-533-6224

Richmond, VA 800-729-6224
Rome, NY 800-559-6224
Salt Lake City, UT 800-874-2404
San Antonio, TX 800-598-6224

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.mbc.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.

www.ecoficientseries.com

03-12/7.5M