




EXPOSED FASTENING SYSTEM

AVP

The AVP panel is used for wall application and features pencil ribs, providing improved aesthetics to the building design.

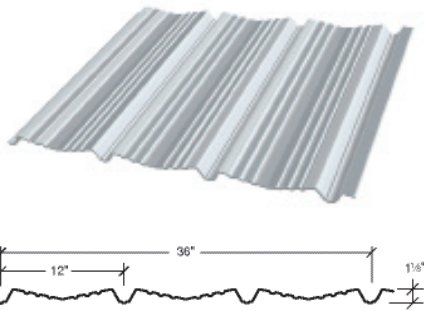

Features and Benefits:

- The AVP panel allows for more insulation to be added behind the panel, providing greater insulating values that meet the energy codes and R-Value requirements.
- UL 263 internal fire rating is available.

Product Specifications

- **Applications:** Wall
- **Coverage Widths:** 36"
- **Rib Spacing:** 12" on center
- **Rib Height:** 1 1/8"
- **Panel Attachment:** Exposed Fastening System
- **Gauges:** 26 (standard); 22, 24 and 29 (optional)
- **Finishes:** Smooth (standard); Embossed (optional)
- **Coatings:** Galvalume Plus®, Signature® 200, Signature® 300

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Positive Wind Load	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.mbc.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence. MBCI's insulated metal panel product line is manufactured by Metl-Span®.