



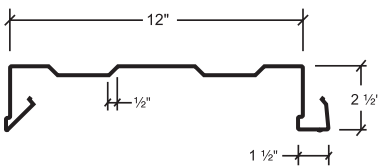

STANDING SEAM METAL ROOFING

NUWALL®

The NuWall® wall panel can be used for either new or retrofit construction. This concealed fastened system creates a clean, uninterrupted wall on a building.

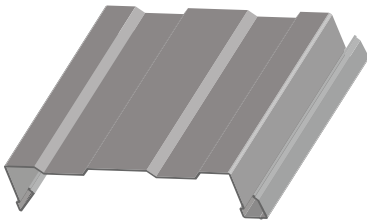

Features and Benefits:

- The NuWall® system is based on a 12-inch module. This means that when using NuWall® over existing metal panels, the existing panel ribs must be 6 inches or 12 inches on center.

Product Specifications

- **Applications:** Wall
- **Coverage Widths:** 12"
- **Panel Attachment:** Concealed Fastening System
- **Gauges:** 24 (standard); 22 (optional)
- **Finishes:** Smooth (standard); Embossed (optional)
- **Coatings:** Galvalume Plus®, Signature® 200, Signature® 300, Signature® 300 Metallic

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	ASTM E 1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section
	Positive Wind Load	ASTM E 1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section