





EXPOSED FASTENING SYSTEMS

PBC

The PBC panels can be used for both roof and wall applications. PBC panels are attached to a building structure with exposed fasteners. The PBC panel is often used in horizontal applications on walls.

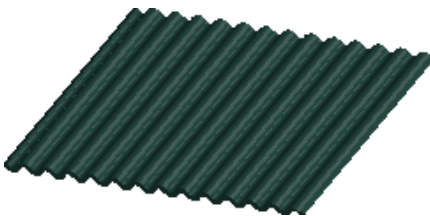

Features and Benefits:

- UL 790 external fire rating is available.

Product Specifications

- **Applications:** Roof and Wall
- **Coverage Widths:** 32"
- **Rib Spacing:** 2.67" on center
- **Rib Height:** 7/8"
- **Minimum Slope:** 3:12
- **Panel Attachment:** Exposed Fastening System
- **Gauges:** 26 (Standard); 29, 24, 22 (Optional)
- **Finishes:** Smooth (standard); Embossed (optional)
- **Coatings:** Galvalume Plus®, Signature® 200, Signature® 300

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section