




EXPOSED FASTENING SYSTEMS

PBD

The PBD panel is an exposed fastened panel system that can be used for roof and wall applications. When used in wall applications, panels can be installed vertically or horizontally. The ribs in the PBD panel are symmetrical from top to bottom, which makes this panel ideal as a roof liner.

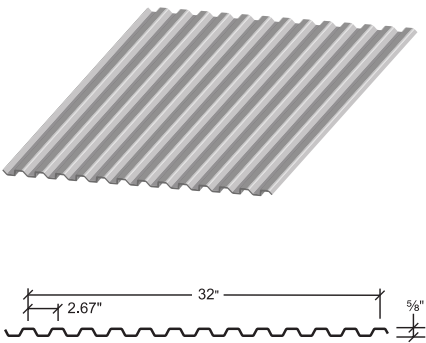

Features and Benefits:

- UL 790, Class A for external fire and roof assembly for UL 263 for internal fire.

Product Specifications

- **Applications:** Roof and Wall
- **Coverage Widths:** 32"
- **Rib Spacing:** 2.67" on center
- **Rib Height:** 5/8"
- **Minimum Slope:** 3:12
- **Panel Attachment:** Exposed Fastening System
- **Gauges:** 26 (Standard); 29, 24, 22 (Optional)
- **Finishes:** Smooth (standard); Embossed (optional)
- **Coatings:** Galvalume Plus®, Signature® 200, Signature® 300

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section