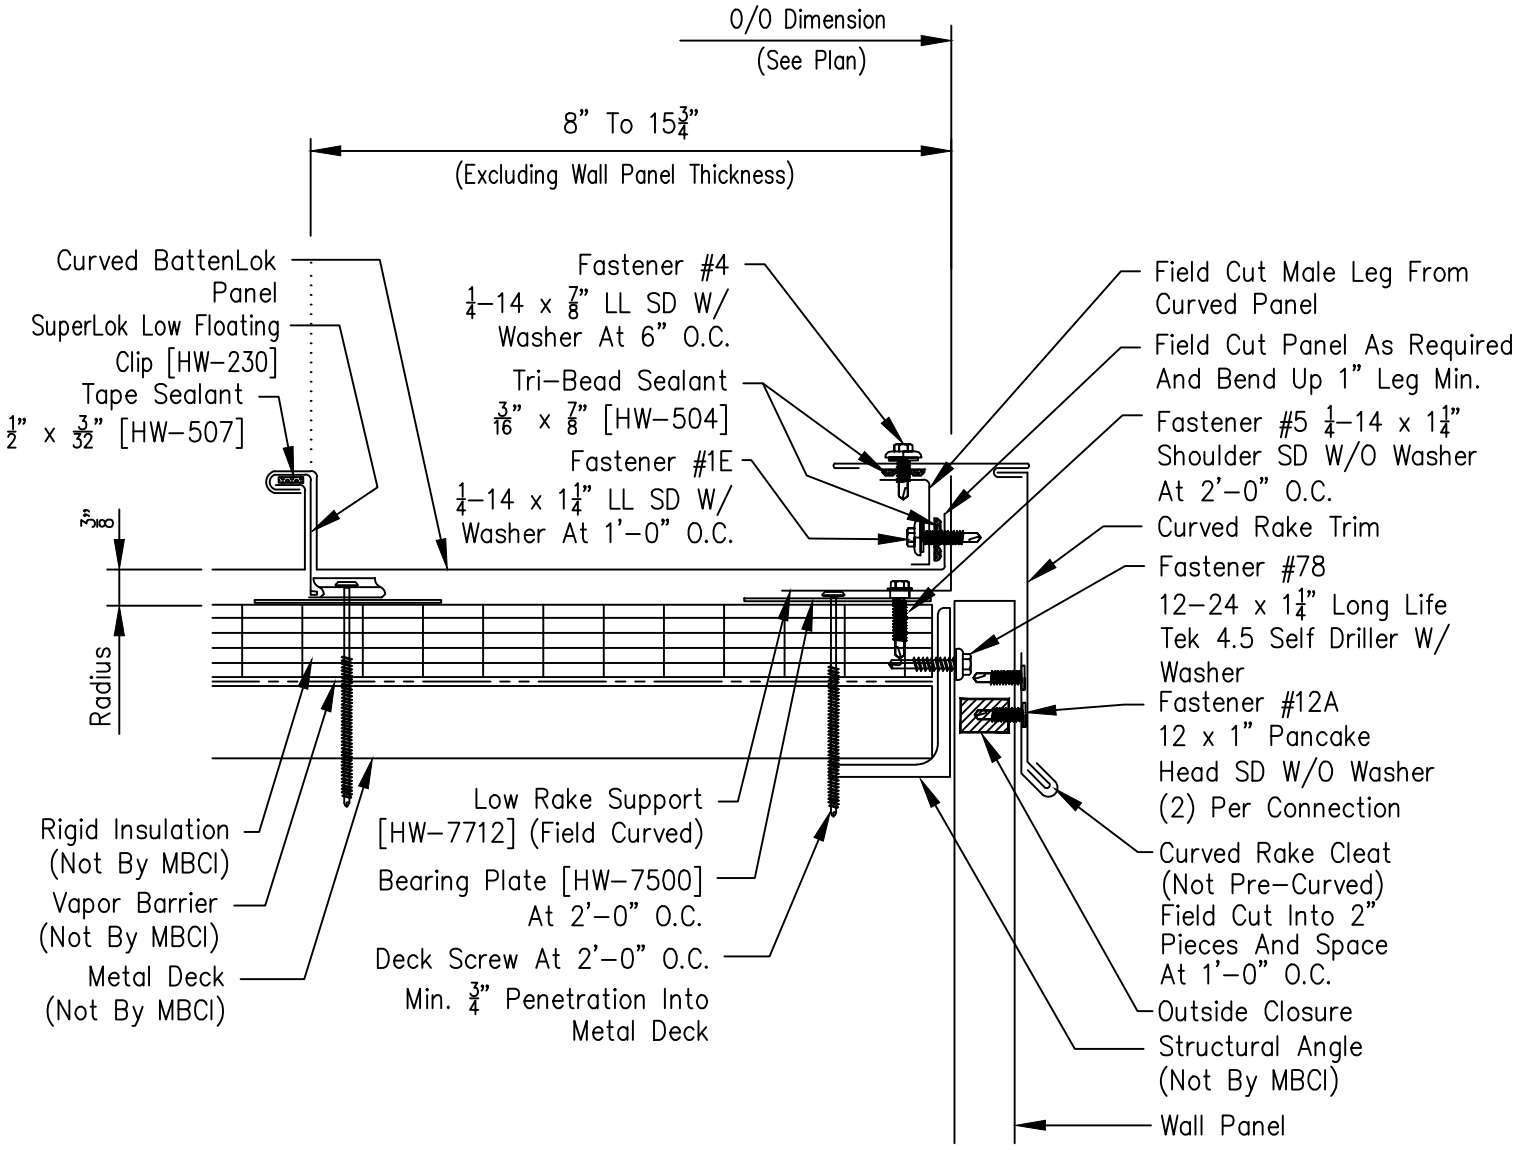
O/O Dimension
(See Plan)
8" To 15¾"
(Excluding Wall Panel Thickness)
Curved BattenLok Panel
SuperLok Low Floating Clip [HW-230]
Tape Sealant ½" x 3/32" [HW-507]
Fastener #4 ¼-14 x ⅞" LL SD W/ Washer At 6" O.C.
Tri-Bead Sealant 3/16" x ⅞" [HW-504]
Fastener #1E ¼-14 x 1¼" LL SD W/ Washer At 1'-0" O.C.
Field Cut Male Leg From Curved Panel
Field Cut Panel As Required And Bend Up 1" Leg Min.
Fastener #5 ¼-14 x 1¼" Shoulder SD W/O Washer At 2'-0" O.C.
Curved Rake Trim
Fastener #78 12-24 x 1¼" Long Life Tek 4.5 Self Driller W/ Washer
Fastener #12A 12 x 1" Pancake Head SD W/O Washer (2) Per Connection
Curved Rake Cleat (Not Pre-Curved) Field Cut Into 2" Pieces And Space At 1'-0" O.C.
Outside Closure
Structural Angle (Not By MBCI)
Wall Panel
3/8"
Radius
Rigid Insulation (Not By MBCI)
Vapor Barrier (Not By MBCI)
Metal Deck (Not By MBCI)
Low Rake Support [HW-7712] (Field Curved)
Bearing Plate [HW-7500] At 2'-0" O.C.
Deck Screw At 2'-0" O.C. Min. ¾" Penetration Into Metal Deck