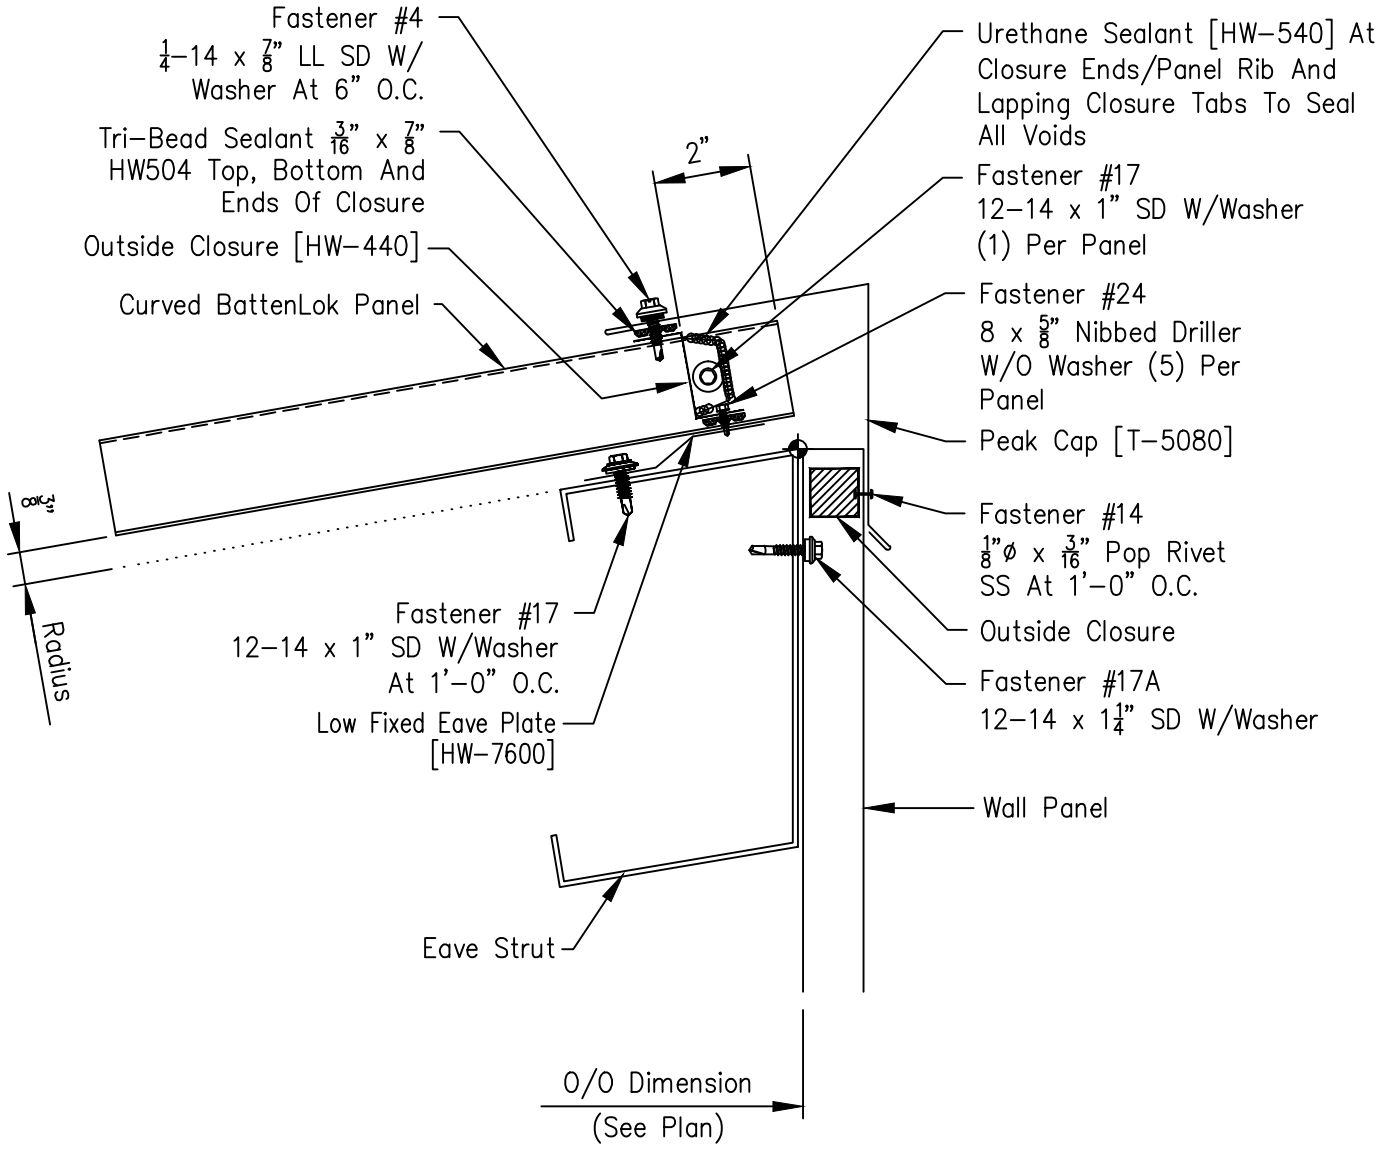
Fastener #4
$\frac{1}{4}$–14 x $\frac{7}{8}$" LL SD W/
Washer At 6" O.C.
Tri–Bead Sealant $\frac{3}{16}$" x $\frac{7}{8}$"
HW504 Top, Bottom And
Ends Of Closure
Outside Closure [HW–440]
Curved BattenLok Panel
2"
Urethane Sealant [HW–540] At
Closure Ends/Panel Rib And
Lapping Closure Tabs To Seal
All Voids
Fastener #17
12–14 x 1" SD W/Washer
(1) Per Panel
Fastener #24
8 x $\frac{5}{8}$" Nibbed Driller
W/O Washer (5) Per
Panel
Peak Cap [T–5080]
$\frac{3}{8}$"
Radius
Fastener #14
$\frac{1}{8}$"Ø x $\frac{3}{16}$" Pop Rivet
SS At 1'–0" O.C.
Outside Closure
Fastener #17
12–14 x 1" SD W/Washer
At 1'–0" O.C.
Low Fixed Eave Plate
[HW–7600]
Fastener #17A
12–14 x $1\frac{1}{4}$" SD W/Washer
Wall Panel
Eave Strut
O/O Dimension
(See Plan)