


PANEL ENGAGEMENT


Field Notch Panel Ribs And Bend Pan To Form Open Hem

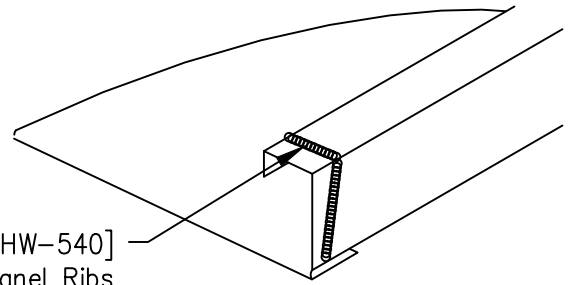

Urethane Sealant [HW-540]
Between Panel Ribs

EAVE SEALANT DETAIL

Urethane Sealant Must Come In Contact With The Drip Edge To Form A Weather Tight Seal

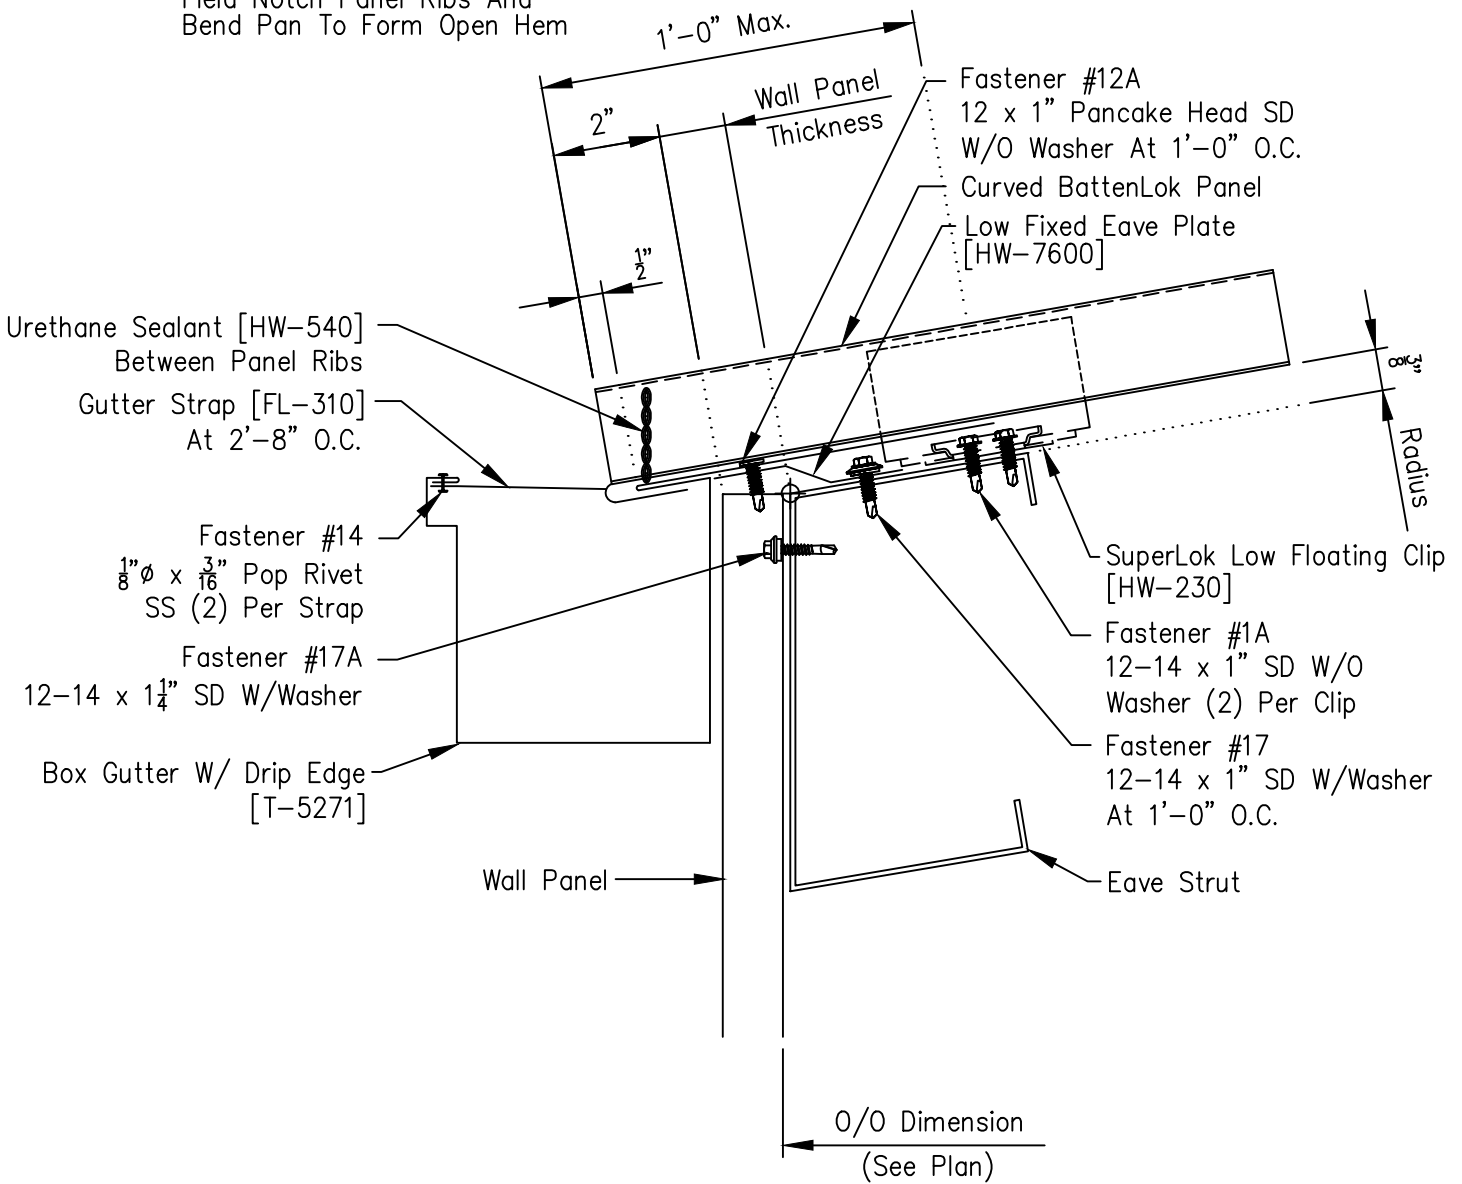

Urethane Sealant [HW-540]
Between Panel Ribs
Gutter Strap [FL-310]
At 2'-8" O.C.

Fastener #14
 $\frac{1}{8} \phi \times \frac{3}{16}$ Pop Rivet
SS (2) Per Strap
Fastener #17A
12-14 x $1\frac{1}{4}$ " SD W/Washer

Box Gutter W/ Drip Edge
[T-5271]

Wall Panel

1'-0" Max.

2" Wall Panel Thickness

$\frac{1}{2}$ "

Fastener #12A
12 x 1" Pancake Head SD
W/O Washer At 1'-0" O.C.
Curved BattenLok Panel
Low Fixed Eave Plate
[HW-7600]

3" Radius

SuperLok Low Floating Clip
[HW-230]
Fastener #1A
12-14 x 1" SD W/O
Washer (2) Per Clip
Fastener #17
12-14 x 1" SD W/Washer
At 1'-0" O.C.

Eave Strut

O/O Dimension
(See Plan)