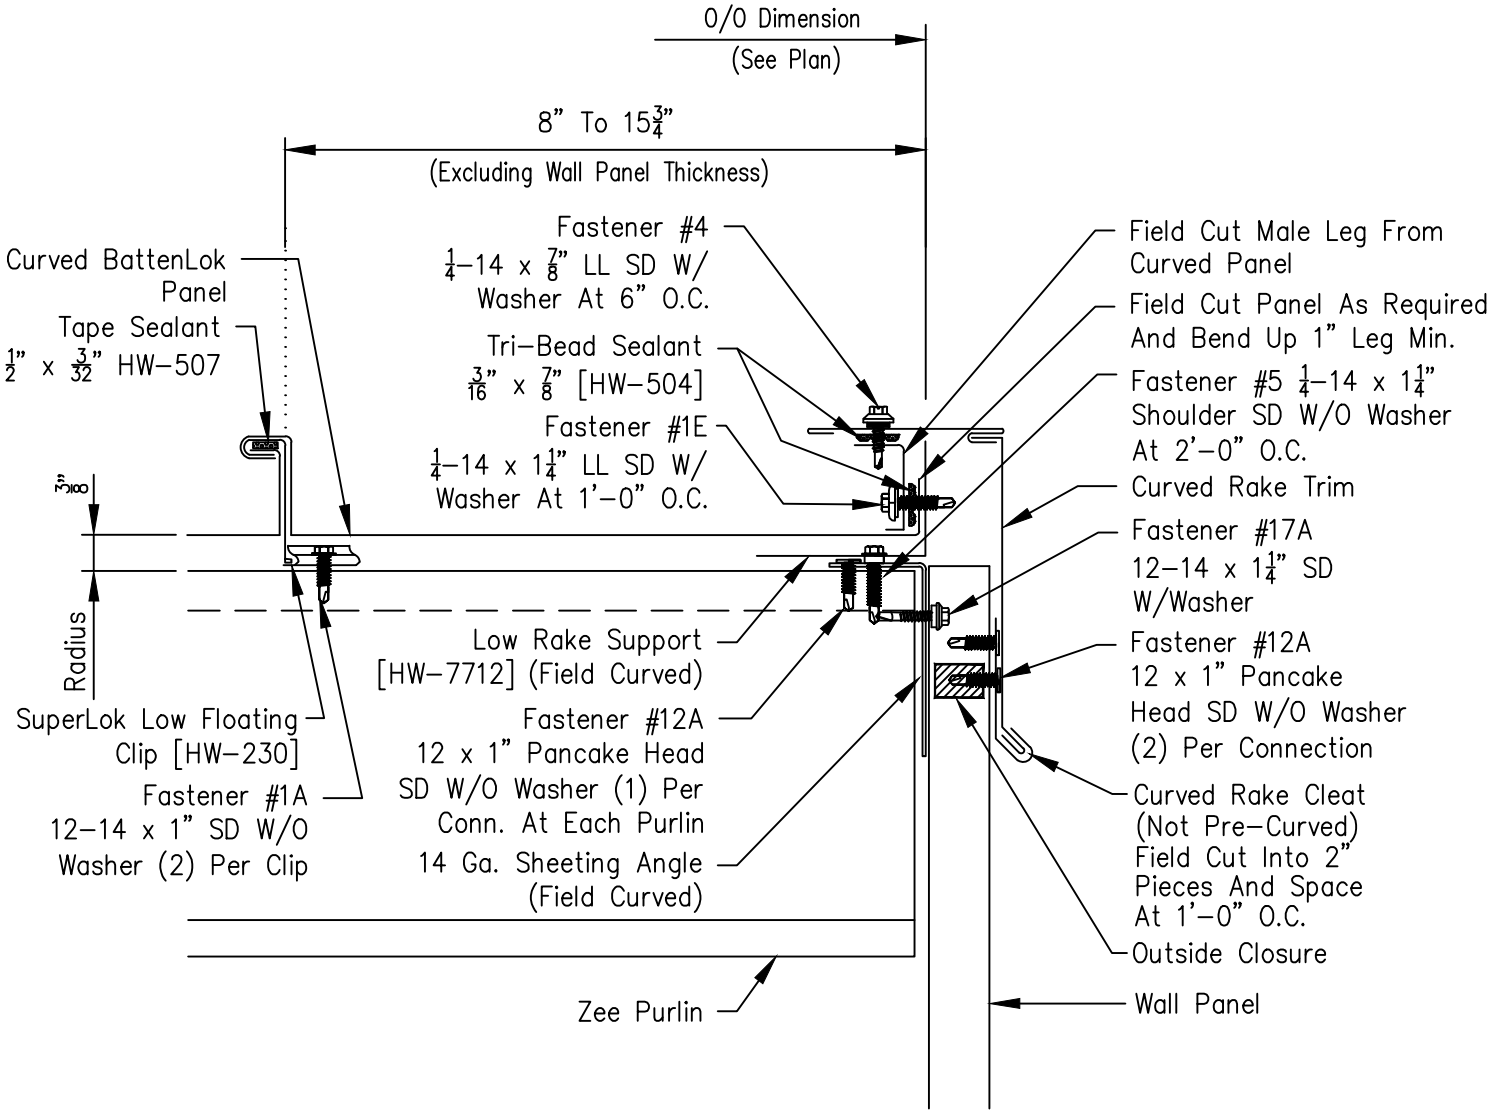
O/O Dimension
(See Plan)
8" To 15¾"
(Excluding Wall Panel Thickness)
Curved BattenLok Panel
Tape Sealant
½" x 3/32" HW-507
Fastener #4
¼-14 x ⅞" LL SD W/ Washer At 6" O.C.
Tri-Bead Sealant
3/16" x ⅞" [HW-504]
Fastener #1E
¼-14 x 1¼" LL SD W/ Washer At 1'-0" O.C.
Field Cut Male Leg From Curved Panel
Field Cut Panel As Required And Bend Up 1" Leg Min.
Fastener #5 ¼-14 x 1¼" Shoulder SD W/O Washer At 2'-0" O.C.
Curved Rake Trim
Fastener #17A
12-14 x 1¼" SD W/Washer
3/16"
Radius
Low Rake Support
[HW-7712] (Field Curved)
Fastener #12A
12 x 1" Pancake Head SD W/O Washer (2) Per Connection
SuperLok Low Floating Clip [HW-230]
Fastener #12A
12 x 1" Pancake Head SD W/O Washer (1) Per Conn. At Each Purlin
Fastener #1A
12-14 x 1" SD W/O Washer (2) Per Clip
14 Ga. Sheeting Angle (Field Curved)
Curved Rake Cleat (Not Pre-Curved) Field Cut Into 2" Pieces And Space At 1'-0" O.C.
Outside Closure
Zee Purlin
Wall Panel