





EXPOSED FASTENING SYSTEMS

PERMA-CLAD®

The Perma-Clad® panel system can be used for both roof and wall applications. Perma-Clad® is great for residential, light commercial, agricultural and storage buildings and also for canopies. The Perma-Clad® panel must be installed over a solid, waterproofed deck when used as a roof panel.

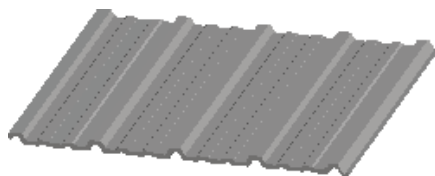

Features and Benefits:

- UL 580 rating is available, as well as UL 790, Class A for external fire, roof assembly for UL 263 for internal fire and the UL 2218 Class 4 impact rating.

Product Specifications

- **Applications:** Roof and Wall
- **Coverage Widths:** 36"
- **Rib Spacing:** 9" on center
- **Rib Height:** 5/8"
- **Minimum Slope:** 3:12
- **Panel Attachment:** Exposed Fastening System
- **Gauges:** 29 (standard); 26 (optional)
- **Finishes:** Smooth (standard);
- **Coatings:** Galvalume Plus®, Signature® 200