

CONCEALED FASTENING SYSTEM


CRAFTSMAN™ SERIES

The Craftsman™ Series is a snap-on batten roof system with a concealed clip. The pan and batten are manufactured separately to maximize design flexibility and for ease of installation at difficult hip, valley and slope change conditions.


The Craftsman™ Series is a water-shedding system and can be used for roofs and mansard only when installed over a water-proofed solid substructure with a minimum roof slope of 3:12. The Craftsman™ Series design makes complicated building transitions simple without the necessity of flashings. Slope changes from roof to fascia to soffit can be made with one continuous pan and batten. A concealed clip securely locks the batten to the panel while allowing for expansion and contraction.

Craftsman™ SB is available in a profile suitable for curving in the field or through a third-party vendor contracted by the customer. Please contact your District Sales Manager for order assistance.

SMALL BATTEN (SB)

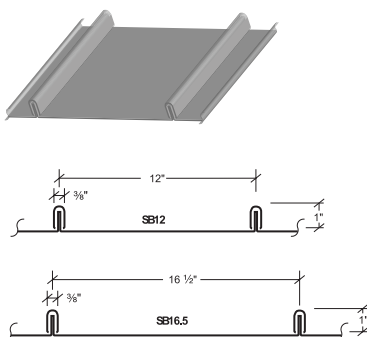

HIGH BATTEN (HB)

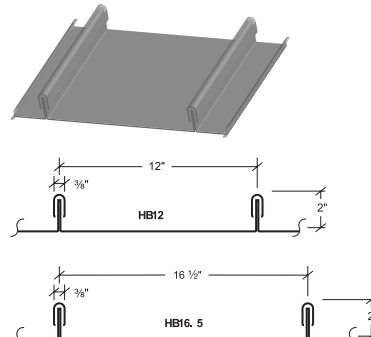

PRODUCT SPECIFICATIONS

Applications: Roof and Fascia

Coverage Width: 12", 16 1/2"

Minimum Slope: 3:12

Panel Attachment: Concealed
Fastening System

Gauges: 24 (standard); 22, 26 (optional)

Finishes: Smooth (standard); Embossed
(optional)

Coatings: Galvalume® Plus, Signature® 200,
Signature® 300, Signature® 300 Metallic

CRAFTSMAN™ SERIES - CONCEALED FASTENING SYSTEM

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
ENVIRONMENTAL	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	Class 4 Rating
FIRE RESISTANCE	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	See Class A Fire Rating Data Sheet
	Room Fire Performance	UL 263	Standard for Fire Tests of Building Construction and Materials. Requires installation over a non-combustible substrate to qualify for Class A rating. Installation over a combustible substrate qualifies for Class C rating.	"For use in Design Nos. P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, P819.
STRUCTURAL	Uplift Resistance	ASTM E 1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section
ROOF LISTINGS	Roof Performance - Underwriters Laboratories	UL 580	Determines the uplift resistance of roof assemblies consisting of the roof and roof coverings materials	Craftsman™ SB - Construction Number 280 and 310. Craftsman™ HB - Construction Number 282 and 309.
	Roof Performance - Florida Approval	UL 580 UL 1897 UL 790	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 42381.7 for Craftsman SB
	Roof Performance - Texas Department of Insurance	UL 580 UL 1897	TWIA provides windstorm and hail insurance in areas exposed to hurricanes and currently provides windstorm and hail coverage in the following 14 "first tier" Texas coastal counties: Aransas, Brazoria, Calhoun, Cameron, Chambers, Galveston, Jefferson, Kenedy, Kleberg, Matagorda, Nueces, Refugio, San Patricio and Willacy.	See RC-25 for Craftsman SB See RC-527 & RC528 for Craftsman HB

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. To ensure you have the latest information available, please inquire or visit our website: mbci.com.

© 2025 MBCI, part of **Cornerstone Building Brands**, Inc. ALL RIGHTS RESERVED. 0706209991113/RevE/MS/1025



844-327-1748 | mbci.com | shop.mbc.com