




# EXPOSED FASTENING SYSTEMS

# RETRO-R®

The Retro-R® Panel is an excellent choice for retrofit construction, and can be applied directly over an existing PBR or R panel to give your building a new look and longer life. This exposed-fastened system has a membrane on the back side to prevent rust from the old roof and from transferring to the Retro-R® panel.

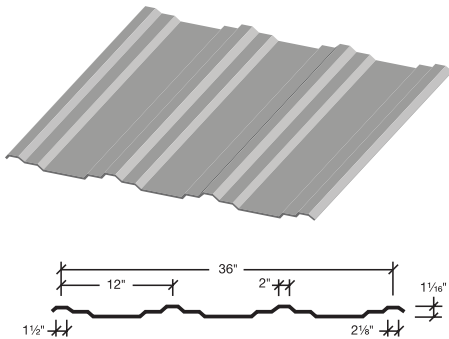

### Product Specifications

- **Applications:** Roof and Wall
- **Coverage Widths:** 36"
- **Rib Spacing:** 12" on center
- **Rib Height:** 1-1/16"
- **Minimum Slope:** 1/2:12
- **Panel Attachment:** Exposed Fastening System
- **Gauges:** 29 (standard); 26
- **Finishes:** Smooth (standard);
- **Coatings:** Galvalume Plus®, Signature® 200

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
ROOF LISTINGS	Roof Performance - Florida Approval	ASTM E 1592	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 21121.1